

## ILA Series

### IF (70/ 140MHz), L-Band & SHF Line Amplifier, Rack Mounted.



#### High Grade Line Amplifier Products;

<b>ILA70</b>	IF 70±20MHz & 140±40MHz frequencies
<b>ILAL-1450</b>	L-Band 950-1450MHz frequencies
<b>ILAL-1750</b>	L-Band 950-1750MHz frequencies
<b>ILAL-2150</b>	L-Band 950-2150MHz frequencies
<b>ILAS-2400</b>	S-Band 2.0-2.4GHz frequencies
<b>ILAC-4200</b>	C-Band 3.4-4.2GHz receive frequencies
<b>ILAC-6725</b>	C-Band 5.85-6.725GHz transmit frequencies
<b>ILAKu-1275</b>	Ku-Band 10.7-12.75GHz receive frequencies
<b>ILAKu-1450</b>	Ku-Band 13.75-14.5GHz transmit frequencies
<b>ILAD-1840</b>	DBS-Band 17.3-18.4GHz transmit frequencies

For other 'non-standard' frequency requirements, please contact the factory.

For multiple-channel units in a single chassis (Dual, Triple, Quad), please consult the factory.

For equivalent units with full user interface, remote control and digital attenuation please see ILAH series datasheet.

For equivalent remote mount units, please see PLA series datasheet.

The 19 inch, 1U rack mounted, **ILA series** of L-Band Line Amplifier units from Peak Communications are designed to provide high quality signal amplification, primarily for satellite Earth station cross-site applications.

The **ILA series** units are mains powered and are constructed of high grade components to give the ultimate Gain flatness and stability performance.

For redundancy the **ILA series** units are fully compatible with the Peak **RCU100** (1+1), **RCU200** (2+1) and **RCU1001** (N+1) systems.

#### Peak Features

- ☒ High gain flatness and stability performance.
- ☒ Amplifier low current alarm monitoring
- ☒ Manually Variable Attenuator options for local control of Gain
- ☒ Integral 1+1 & 2+1 CANBUS® redundancy control & N+1 switch systems available
- ☒ Monitor and Fibre Optic L-Band interface options available
- ☒ Fully compatible with **RCU100/ RCU200 series** 1+1/ 2+1 redundancy controllers and **RCU1001 series** for N+1 redundancy units



## ILA series - Typical Specification

### Input

<b>ILA70;</b>	50-200MHz
<b>ILAL-1450;</b>	950-1450MHz
<b>ILAL-1750;</b>	950-1750MHz
<b>ILAL-2150;</b>	950-2150MHz
<b>ILAS-2400;</b>	2.0-2.4GHz
<b>ILAC-4200;</b>	3.4-4.2GHz
<b>ILAC-6725;</b>	5.85-6.725GHz
<b>ILAKu-1275;</b>	10.7-12.75GHz
<b>ILAKu-1450;</b>	13.75-14.5GHz
<b>ILAD-1840;</b>	17.3-18.4GHz

Connector	SMA (f), 50Ω
Option 1a;	N-Type (f), 50Ω
Option 1c;	BNC (f), 50Ω (<2150MHz only)
Option 1e;	BNC (f), 75Ω (<2150MHz only)
Return loss	16dB

### Output

Connector	SMA (f), 50Ω
Option 1b;	N-Type (f), 50Ω
Option 1d;	BNC (f), 50Ω (<2150MHz only)
Option 1f;	BNC (f), 75Ω (<2150MHz only)
Return loss	18 to 22dB (frequency dependent)

### RF Performance

Gain	20dB min
<i>Note: for higher Gain options please contact the factory</i>	
Gain flatness	±0.25dB (bandwidths <500MHz) ±0.5dB (bandwidths <800MHz) ±1dB (bandwidths <1200MHz)
Active Directivity	22dB typ., 20dB min
RF Input power	-10dBm max (no load, no damage)
TOIP	+25dBm (+20dBm >2150MHz)
1dB Output GCP	+13dBm (+8dBm >2150MHz)
<i>Note: for higher GCP options please contact the factory</i>	
Noise Figure	7 to 9dB (frequency dependent)

### Monitor (Input Option 2a, Output Option 2b)

Connector	SMA (f), 50Ω on rear panel
<i>Note: for other connection types please contact the factory</i>	
Level	-20dBc ±3dB

### Variable L-Band Attenuation (Option 10)

Attenuation range	30dB
Control	Local, continuously variable from front panel

### 10MHz Reference Pass-through (Option 5)

Allows 10MHz reference fed into the unit (multiplexed onto input connection) to 'pass-through' to output (L-Band only).

### Mechanical

Width	19" standard rack mountable
Height	1U (1.75")
Depth	400mm (15.7"), plus connectors
Construction	Aluminium chassis
Weight	5.5kgs (12lbs)

### Environmental

Operating temp	0°C to +50°C
EMC	EN 55022 part B & EN 50082-1
Safety	EN 60950

### Power Supply

Voltage	115/ 230VAC±10%, selectable, Linear power supply
Frequency	50/ 60Hz
Total power	50 Watts max

### Control System Interface


Discrete 'alarms interface'	PSU fail Amplifier current detection
-----------------------------	---

### Options

- 1a) N-Type (f), 50Ω input interface connection
- 1b) N-Type (f), 50Ω output interface connection
- 1c) BNC (f), 50Ω input interface connection
- 1d) BNC (f), 50Ω output interface connection
- 1e) BNC (f), 75Ω input interface connection
- 1f) BNC (f), 75Ω output interface connection
- 2a) -20dBc input monitor on rear panel
- 2b) -20dBc output monitor on rear panel
- 5) 10MHz reference pass-through on L-Band interface
- 6a) Fibre optic L-band output interface connection
- 6b) Fibre optic L-band input interface connection
- 10a) Manual Variable Attenuator, 30dB at L-Band
- 10b) manual variable attenuator, 30dB at SHF

*Notes; the addition of options can modify the typical specification, for details please consult the factory*

## Rear panel view

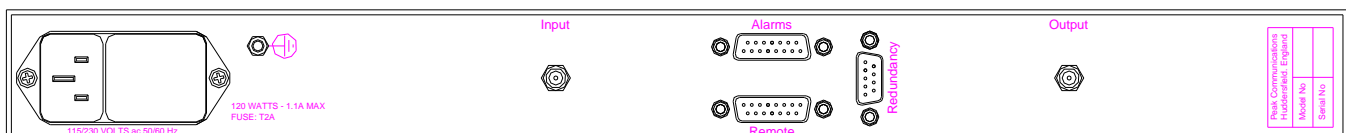

Peak Communications reserves the right to alter the specifications of this equipment without prior notice. ILASeries-180711.

Peak Communications Ltd, 22 West Park Street, Brighouse, HD6 1DU, England

Tel; +44 (0)1484 714200 Sales; +44 (0)1484 714229 Fax; +44 (0)1484 723666 Email; [sales@peakcom.co.uk](mailto:sales@peakcom.co.uk) Web; [www.peakcom.co.uk](http://www.peakcom.co.uk)