

RBU600-1

1+1 Redundant, High Grade, C-Band, Block UpConverter system









The **RBU600-1** 1+1 redundant C-Band block UpConverter system comprises two **IBU600** block UpConverters, plus an **RCU100** control unit along with matched SHF, L-Band and a complete control interface cable set. It includes all that is required to implement a single-feed 1+1 redundant C-Band UpConverter system, maintaining maximum availability whilst allowing routine maintenance and repair work to be carried out on the standby converter without the normally associated down-time.

The **RBU600-1** system maintains one converter on-line whilst the other is held in hot standby, allowing the user to select the on-line converter. The redundancy unit can be controlled from the front panel (local mode) or by the RS232/RS485 link to a host computer (remote mode). In remote mode, the on-line converter can be selected and monitored whilst keeping switch-over automatic in case of failure.

In AUTO mode, the **RCU100** control unit monitors the converter alarm signals via the interface connecting cables and if a fault condition develops within the on-line converter, the **RCU100** automatically switches traffic to the standby unit.

All units are mains powered and are constructed of high grade components to give the ultimate stability, ripple and phase noise performance. The converters utilise externally phase locked dielectric resonator oscillators (XPDROs) and are far superior in stability and phase noise to voltage controlled oscillators (VCOs), as commonly used in other BUC designs.

Peak Features

-  High stability, low ripple and excellent phase noise
-  10MHz external reference option fitted as standard with automatic internal reference back-up
-  Dual mains input & redundant power supplies on control unit fitted as standard
-  Keys removable for security in any position
-  Dual switching arrangement (L-band and SHF)
-  Matched SHF, L-band and converter control interface cable set provided as standard



RBU600-1 Typical Specification

SHF Output

Frequency	5.85-6.425GHz
Connector	50Ω, SMA (f)
Return loss	>15dB
1dB GCP	+7dBm
Option 5;	+17dBm

L-Band Input

Frequency	950-1525MHz
Connector	50Ω, SMA (f)
Option 3;	75Ω, BNC (f)
Return loss	>15dB

System Transfer Characteristics

Conversion gain	14dB ±1dB at band centre
Option 4;	24dB ±1dB at band centre
Gain stability	±0.5dB from 0 to 40°C
Gain flatness	±0.5dB full band
	±0.25dB across 40MHz in band
1+1 changeover	1dB max variation (unit to unit)

RF Performance

LO Phase noise (typical with good phase noise ext. 10MHz ref)	-55dBc/Hz at 10Hz -75dBc/Hz at 100Hz -92dBc/Hz at 1kHz -100dBc/Hz at 10kHz -105dBc/Hz at 100kHz -125dBc/Hz at 1MHz
Harmonics	Better than -50dBc
Spurious	<-80dBm (in band non-carrier related) <-75dBc (in band carrier related)
3rd order intercept	>+17dBm (Option 5; >+27dBm)
LO leakage	-80dBm (always out of band)

Manual Attenuation (Option 10)

Attenuation range	30dB nominal
Control	Continuously variable from front panel

Notes; options 10c & 10d offer manually adjustable attenuators fitted to the switch unit 'common' input or output paths. Can degrade gain flatness performance.

SHF & L-Band Monitor (Option 2) on converters

Connector	Option 2a; L-Band monitor, 50Ω, SMA (f) on rear panel
	Option 2b; L-Band monitor, 50Ω, SMA (f) on front panel
	Option 2c; SHF monitor, 50Ω, SMA (f) on rear panel
	Option 2d; SHF monitor, 50Ω, SMA (f) on front panel

Note; for other connector types please consult the factory

Level	-20dBc ±3dB
-------	-------------

Internal Reference Stability

Allan deviation	5×10^{-11} over 1s
Ageing	$<5 \times 10^{-9}$ per day, $<5 \times 10^{-7}$ per year
Temp stability	$<5 \times 10^{-8}$ over 0 to 50°C

High stability (Option 8)

Allan deviation	3×10^{-12} over 1s
Ageing	$<2 \times 10^{-10}$ per day, $<2 \times 10^{-8}$ per year
Temp stability	$<3 \times 10^{-9}$ over 0 to 50°C

External Reference Input

Frequency	10MHz (5MHz factory settable)
Connector	50Ω, BNC (f)
Level	0dBm ±3dB
Required phase noise	to be better than 50dBc/Hz of output phase noise
Locking delay	<2 minutes to stabilise from cold

Switch Element Parameters

Switching speed	<15ms
Type	Co-axial, latching
Response speed	<150ms (from fault to switch completion)

Mechanical

Width	19" standard rack mountable
System height	3U (1U (1.75") x 3)
Depth	~400mm (15.7"), plus connectors
Construction	Aluminium chassis
Weight	13kgs (~28lbs) approx

Environmental

Operating temp	0°C to +50°C
EMC	EN 55022 part B & EN 50082-1
Safety	EN 60950

Power Supply

Voltage	90-264VAC
	Dual redundant PSU on switch unit
Frequency	47-63Hz
System power	130 Watts max

Control System

Rem/Loc switch	2 position key switch, for remote/ local mode
Auto/A/B switch	3 position key switch, selects converter A or B to traffic manually, or automatically
Remote control	RS232/RS485 port
Option 9;	Ethernet; embedded web server & SNMP network management support
Converter alarm	PSU fail, LO lock fail & Amp fail


Options

- 2a) -20dBc L-band monitor on rear panel (SMA)
- 2b) -20dBc L-band monitor on front panel (SMA)
- 2c) -20dBc SHF monitor on rear panel (SMA)
- 2d) -20dBc SHF monitor on front panel (SMA)
- 3) 75Ω interface at L band (gain reduced by 6dB)
- 4) Extra 10dB increase in gain, to +24dB ±1dB
- 5) 1dB GCP increase to +17dBm (includes extra 10dB Gain option)
- 8) High stability internal reference option
- 9) Ethernet interface, replaces RS232/485 port
- 10c) System input manual variable attenuator, 0-30dB
- 10d) System output manual variable attenuator, 0-30dB

Note; the addition of options can modify the typical specification, for details please consult the factory



Rear panel Views

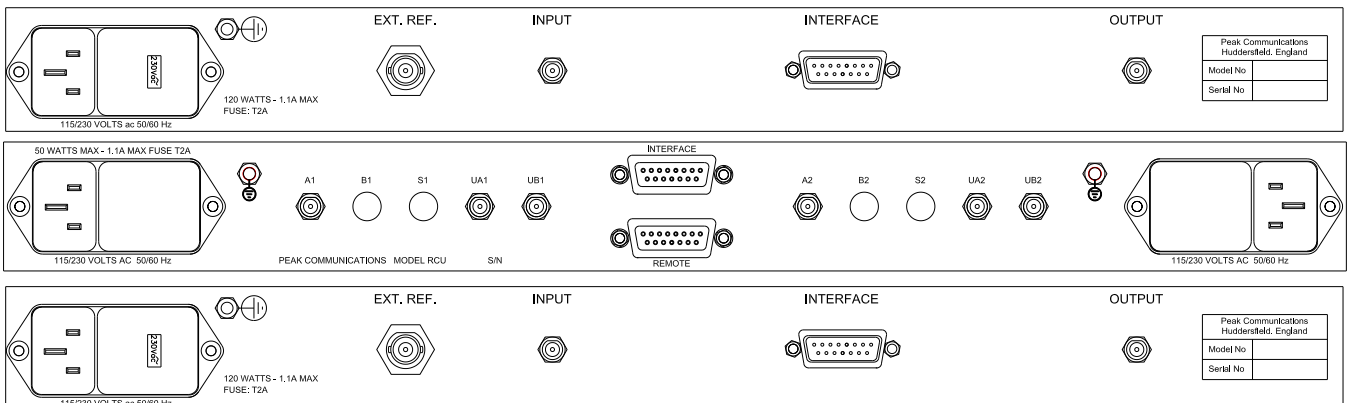

Peak Communications reserves the right to alter the specifications of this equipment without prior notice. RBU600-1-291215.

Peak Communications Ltd., Unit 1, The Woodvale Centre, Woodvale Road, Brighouse, West Yorkshire, HD6 4AB, U.K.

Tel; +44 (0)1484 714200 Sales; +44 (0)1484 714229 Fax; +44 (0)1484 723666 Email; sales@peakcom.co.uk Web; www.peakcom.co.uk